


# Trolleys | Push & geared / Articulated

## Features:

- Capacities 500-25.000 Kg
- Developed for extreme small curved beams
- Suspension of all types of hoists
- Excellent characteristics due to special slewing points and guidance wheels
- Articulated trolley always designed for one specific fixed beam type
- Standard surface treatment, 2 layer Alkyd paint 80 µm, RAL 7021
- Trolley wheels with life time lubricated bearings
- Wheel break supports and anti-tilt device integrated

## Optional:

- Special constructional design to suit specific hoist type
- Rubber buffers on trolley
- Stainless steel name plates
- Load test, with certificate
- Non corrosive treatments, special surface protection for aggressive environments, outdoor applications, offshore & marine environments. Reference to page 42 of this catalogue for detailed application information

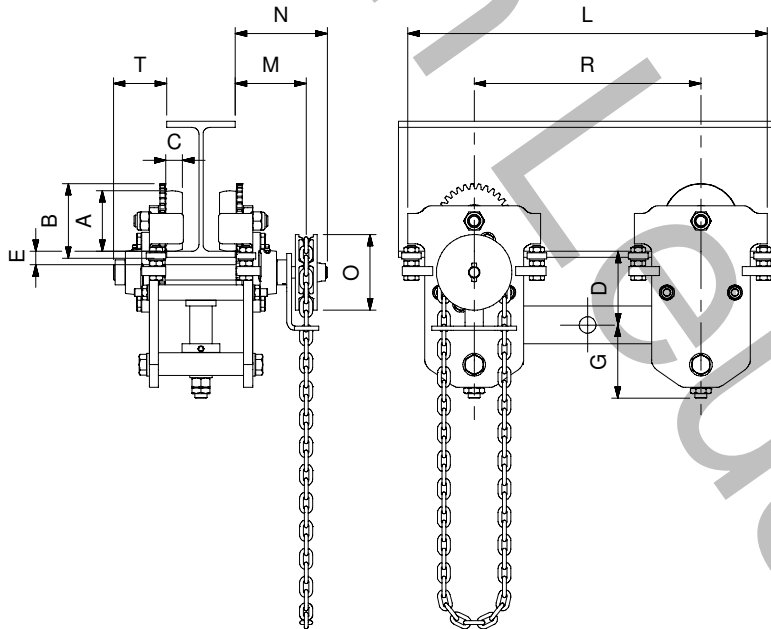

## Technical information:

- 1) Max. INP profile restriction for 11KN = INP300, 22KN = INP360, 33 KN = INP400, 52/64 KN = INP450.
- 2) Extreme small beamwidth-combination with Radius, please contact us or your local agent.

Trolleys / Push & Geared / Articulated (Art. group 83300)																						
Capacity	Hoist Mass Max.	Chassis Type	Beam width fixed	R (min. Radius Beam 2)	Dimensions											Chain Pull Max.	Push 83300 Art. Nr.	Push Price €	Geared 83300 Art. Nr.	Geared excl. Handchain Price €	Galvanized Handchain Control length Price / m €	Stainless Handchain Control length Price / m €
					A	B	C	D	E	G	L	R	M	N	O							
Kg.	Kg.		mm.	mm.																		
500	100	11 KN	fixed	400	60	75	18	148	18	59	455	300	70	95	100	63	10	..-01101	..-01111			
1.000	120	11 KN	fixed	400	60	75	18	145	18	64	455	300	70	95	100	63	10	..-01102	..-01112			
2.000	250	22 KN	fixed	450	80	100	22	152	20	73	525	350	73	98	135	66	16	..-02201	..-02211			
3.200	150	33 KN	fixed	500	100	120	25	191	20	73	570	380	77	102	195	70	20	..-03301	..-03311			
5.000	300	52 KN	fixed	600	125	150	30	197	26	100	625	400	79	109	195	72	20	..-05201	..-05211			
6.300	200	64 KN	fixed	600	125	150	30	214	26	100	675	450	82	112	270	75	25	..-06401	..-06411			
8.000	550	84 KN	fixed	800	160	190	35	208	33	130	705	450	87	107	300	80	16	..-08401	..-08411			
10.000	600	104 KN	fixed	900	160	190	35	261	33	130	780	500	87	107	380	80	19	..-10401	..-10411			
12.500	150	124 KN	fixed	@	160	190	35	@	@	@	@	@	@	@	@	@	23	..-12401	..-12411			
16.000	700	164 KN	fixed	@	200	240	50	@	@	@	@	@	@	@	@	@	20	..-16401	..-16411			
20.000	800	204 KN	fixed	@	200	240	50	@	@	@	@	@	@	@	@	@	25	..-20401	..-20411			
25.000	900	254 KN	fixed	@	200	240	50	@	@	@	@	@	@	@	@	@	25	..-25401	..-25411			

@ = on request